

FLASH YOUR LAMPS

Product



Colours



Description

It takes balls to Flash Your Lamps – or at least lamps.

This is our dashing lamp suspension made to flash a cluster of up to nine lamps of your choice. We particularly love the cluster of Ballroom Globes, and New Wave pendants.

Dimensions

Lamp height	35	cm
Lamp width	75	cm
Canopy size	Ø15	cm
Item weight	2,7	kg

Material

Shiny brass or matte black

Perfect for showing off – and your lamps

Adjustable arms

Up to nine lamps

Gold

EAN: 5713874227705

Style No.: 22770

Gold Deluxe

EAN: 5713874227712

Style No.: 22771

Black

EAN: 5713874227729

Style No.: 22772

Black Deluxe

EAN: 5713874227736

Style No.: 22773

Package information

Package type:	Cardboard box	
Package Measurement:	L - 41 x W - 41 x H - 15 cm	
Package weight - Total:	3,4	kg
Number of parcels:	1	pcs.
Colli quantity:	1	pcs.

Contents

- 4 short arms
- 4 long arms
- Base

Use restrictions

Environment	-	Indoors
IP Classification	-	IPXX
Certifications and labels		


Safety instructions

If the cord or other electrical parts are damaged, switch off the lamp and do not use it until it is repaired by a qualified electrician.

Light source

Recommended bulb type:	N/A
Socket:	N/A
Voltage:	N/A
Max. light output:	N/A
Colour Temp.:	N/A
Lumen:	N/A
Dimmable:	N/A
Lightbulb incl.:	N/A

Technical drawing

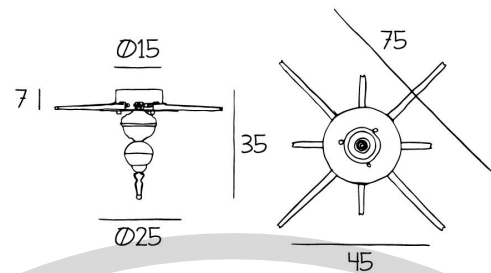


Installation instructions

Assembly of the Flash Your Lamps

1. First you take the base and make sure you only have the base


2. then you mount the arms you want in the positions you want. You can do this later, but it is easier when the system is not hanging from the ceiling. Remember you can mount it anyway you like. You do not have to use all the arms.

3. Mount the system in the desired place on your ceiling by putting a screw through the three holes on the base

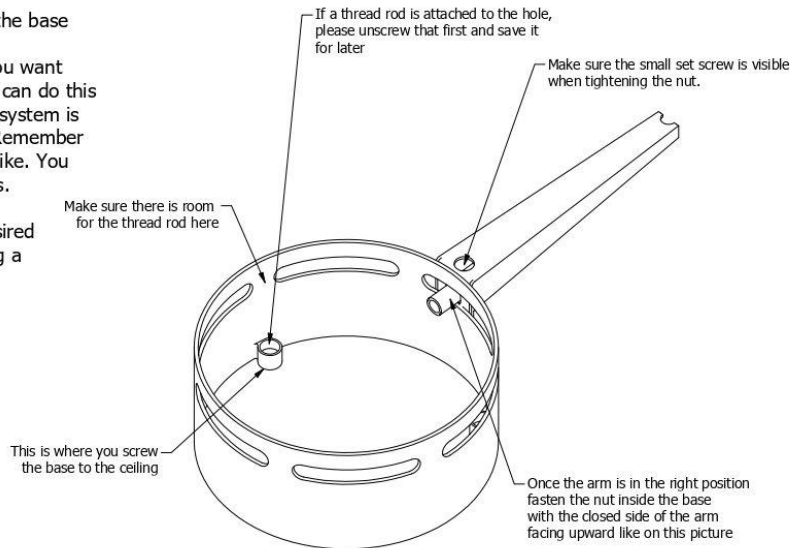


4. Once the base with the mounted arms are mounted securely in the ceiling, you can start mounting the thread rods in the holes in the base where the screw for mounting the base to the ceiling is placed.

5. Then you just have to run all the cables for your lamps and fasten them in the desired lengths, shorten and connect them all to your electrical circuit. You can run the cable through the slots in the base if it is not mounted on top of the output.

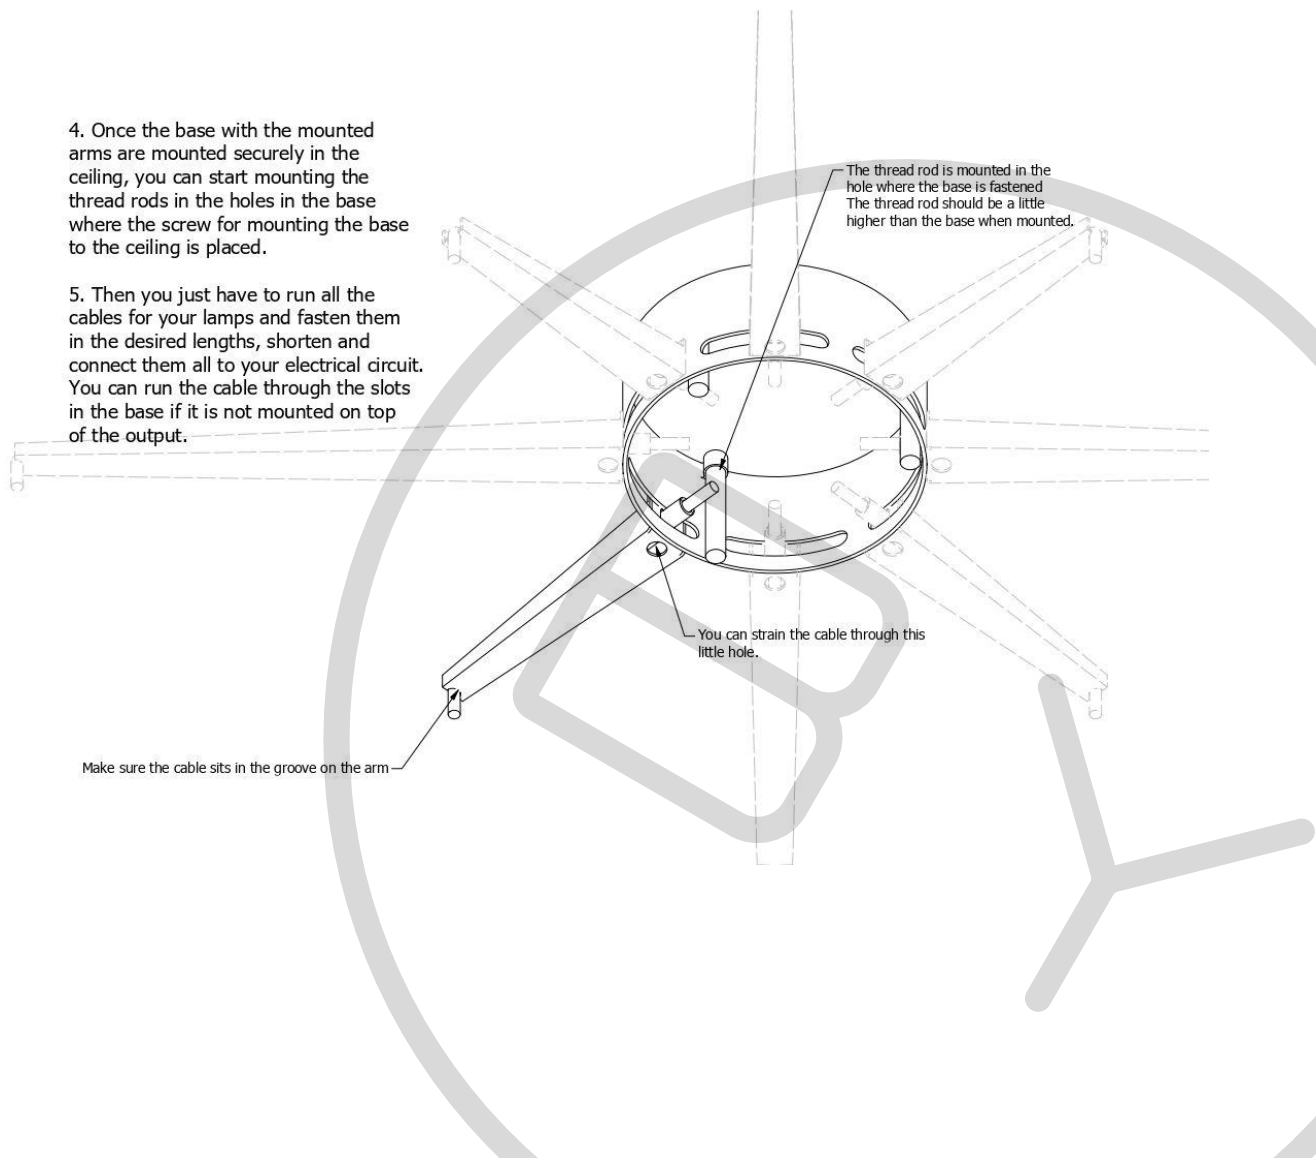

6. When all the lamps in place and the electric wiring done, it is now time to put the finish plate on the base. This is done by aligning the three holes in the plate with the three thread rods in the base. Then just push the plate up and screw the brass tops on the three thread rods.

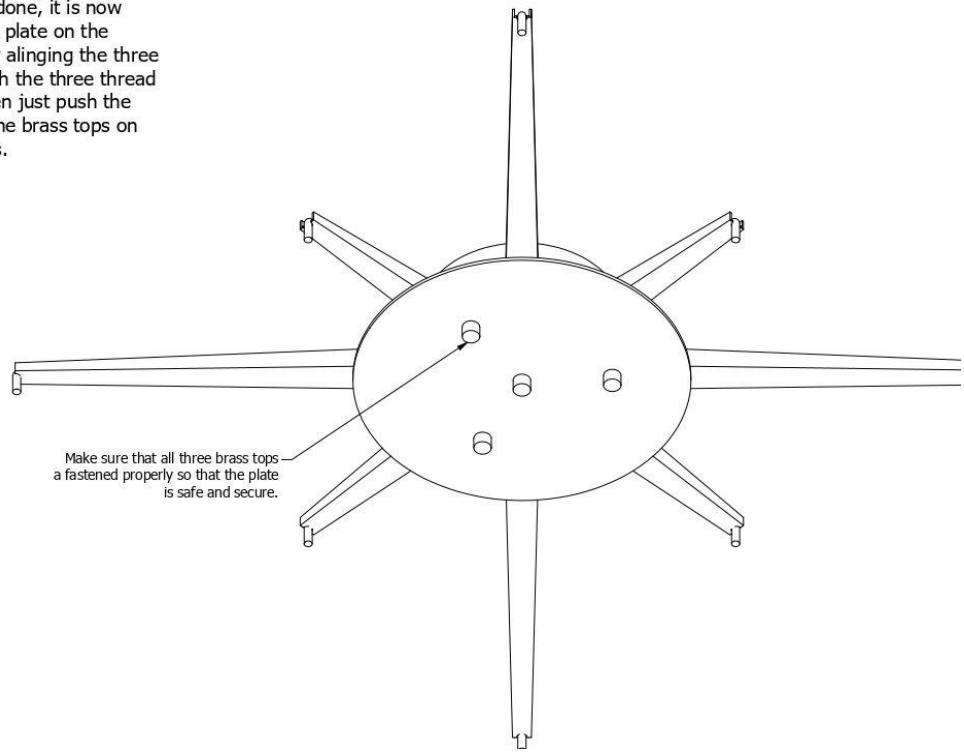

Make sure that all three brass tops are fastened properly so that the plate is safe and secure.

